

# RILSAMID® AESNO TL

PA12, EHL, 22-010

Rilsamid® AESNO TL resin is a rigid polyamide with high viscosity. This natural grade is designed for tube extrusion.


## MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
<b>RHEOLOGICAL PROPERTIES</b>			
Melt Volume-Flow Rate	8 / *	cm <sup>3</sup> /10min	ISO 1133
Temperature	235 / *	°C	-
Load	5 / *	kg	-
<b>MECHANICAL PROPERTIES</b>			
Tensile Modulus	1500 / 1440	MPa	ISO 527-1/-2
Yield stress	50 / 43	MPa	ISO 527-1/-2
Yield strain	5 / 5	%	ISO 527-1/-2
Nominal Strain at Break	>50 / >50	%	ISO 527-1/-2
Charpy Impact Strength, +23°C	- / N	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy Impact Strength, -30°C	- / N	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / 11	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 6	kJ/m <sup>2</sup>	ISO 179/1eA
Puncture - Maximum Force, -30°C	- / 4800	N	ISO 6603-2
Puncture Energy, -30°C	- / 60	J	ISO 6603-2
<b>THERMAL PROPERTIES</b>			
Melting Temperature, 10°C/min	180 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	55 / *	°C	ISO 75-1/-2
Temp. of Deflection Under Load, 0.45 MPa	135 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	142 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	100 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nominal Thickness	HB / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
Yellow Card available	yes / *	-	-
<b>ELECTRICAL PROPERTIES</b>			
Volume Resistivity	- / 1E12	Ohm*m	IEC 60093
Surface Resistivity	* / 1E14	Ohm	IEC 60093
Dielectric (Electric) Strength	- / 30	kV/mm	IEC 60243-1
Comparative Tracking Index	* / 600	-	IEC 60112
<b>OTHER PROPERTIES</b>			
Water Absorption	1.6 / *	%	Sim. to ISO 62
Density	1010 / 1010	kg/m <sup>3</sup>	ISO 1183


Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018

## DIAGRAMS


### DYNAMIC SHEAR MODULUS-TEMPERATURE

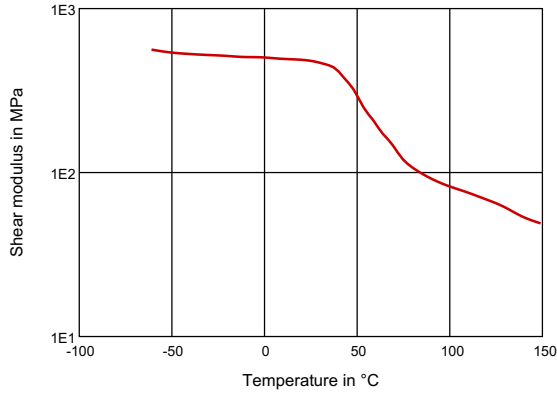

### STRESS-STRAIN

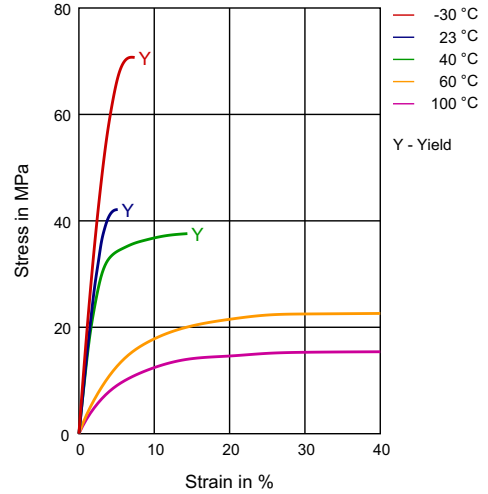

### SECANT MODULUS-STRAIN

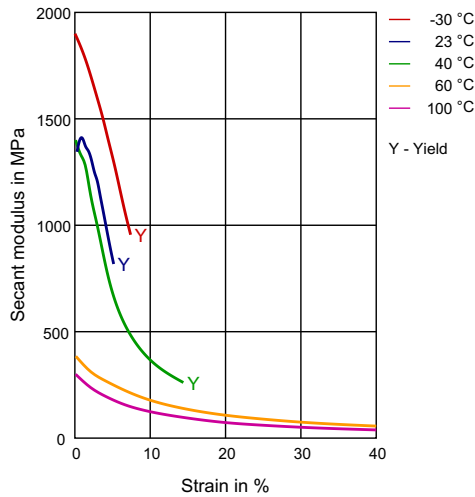

## PROCESSING

Injection Molding, Film Extrusion, Profile Extrusion, Sheet Extrusion, Other Extrusion

## SPECIAL CHARACTERISTICS

Heat Stabilized, Light Stabilized, UV Stable

## REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central

# RILSAMID® AESNO TL

## DELIVERY FORM

Pellets

## ADDITIVES

Lubricants

America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsamid® is a registered trademark of Arkema  
© 2020 Arkema Inc. All rights reserved.

[rilsamid.com](http://rilsamid.com)

**RILSAMID®**  
**BY ARKEMA**

**Arkema Inc. – Technical Polymers**

900 First Avenue  
King of Prussia, PA 19406  
Tel.: +1 610 205 7000  
Fax: +1 610 205 7497  
[arkema-america.com](http://arkema-america.com)

**Headquarters: Arkema France**

420, rue d'Estienne d'Orves  
92705 Colombes Cedex – France  
Tel.: +33 1 49 00 80 80  
Fax: +33 1 49 00 83 96  
[arkema.com](http://arkema.com)