

RILSAN® BMNO P20 TLD

PA11-P, MHLR, 12-005

Rilsan® BMNO P20 TLD resin is a polyamide 11 produced from a renewable source. This natural grade is plasticized and designed for injection molding.

The percentage of renewable carbon according to ASTM D 6866 (calculated) is **>92%**.

MAIN CHARACTERISTICS

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	18.5 / *	cm ³ /10min	ISO 1133
Temperature	235 / *	°C	-
Load	2.16 / *	kg	-
MECHANICAL PROPERTIES			
Tensile Modulus	- / 545	MPa	ISO 527-1/-2
Yield stress	- / 32	MPa	ISO 527-1/-2
Yield strain	- / 30	%	ISO 527-1/-2
Nominal Strain at Break	- / >50	%	ISO 527-1/-2
Shore D Hardness, 15s	61 / *	-	ISO 7619-1
Charpy Impact Strength, +23°C	- / N	kJ/m ²	ISO 179/1eU
Charpy Impact Strength, -30°C	- / N	kJ/m ²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	- / N	kJ/m ²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	- / 7	kJ/m ²	ISO 179/1eA
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	186 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	47 / *	°C	ISO 75-1/-2
Temp. of Deflection Under Load, 0.45 MPa	135 / *	°C	ISO 75-1/-2
Vicat Softening Temperature, 50°C/h 50N	145 / *	°C	ISO 306
Coeff. of Linear Thermal Expansion, parallel	100 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nominal Thickness	HB / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
Burning Behav. at Thickness h	HB / *	class	IEC 60695-11-10
Thickness Tested	3.2 / *	mm	-
Oxygen Index	22 / *	%	ISO 4589-1/-2
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	7 / -	-	IEC 60250
Relative Permittivity, 1MHz	3 / -	-	IEC 60250
Dissipation Factor, 100Hz	1900 / -	E-4	IEC 60250
Dissipation Factor, 1MHz	614 / -	E-4	IEC 60250
Volume Resistivity	- / 1E10	Ohm*m	IEC 60093

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

RILSAN® BMNO P20 TLD

Surface Resistivity	* / 2E12	Ohm	IEC 60093
Electric Strength	- / 26	kV/mm	IEC 60243-1
Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption	1.8 / *	%	Sim. to ISO 62
Density	1050 / 1050	kg/m ³	ISO 1183
%Bio-Based	92	-	ASTM D6866
POWDER PROPERTIES			
Shore D Hardness, 15s	61 / *	-	ISO 7619-1

MAIN APPLICATIONS:

- Tennis racquet bumpers

PACKAGING:


This grade is delivered dried in sealed packaging (25 kg bags) ready to be processed.

SHELF LIFE:


Two years from the delivery. For any use above this limit, please refer to our technical services.

DIAGRAMS


VISCOSITY-SHEAR RATE

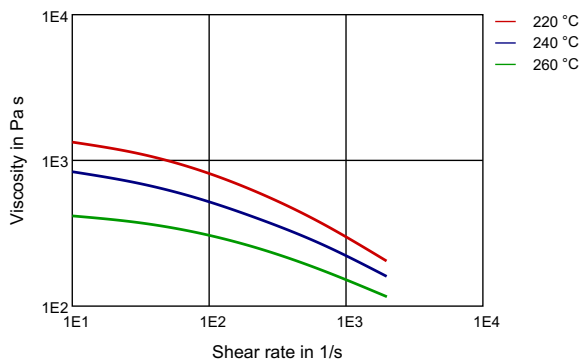


SHEARSTRESS-SHEAR RATE

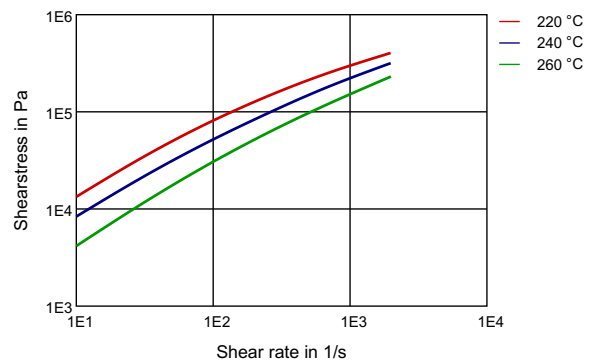


DYNAMIC SHEAR MODULUS-TEMPERATURE

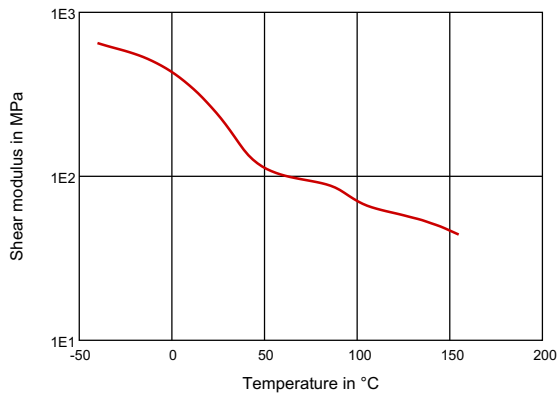

STRESS-STRAIN

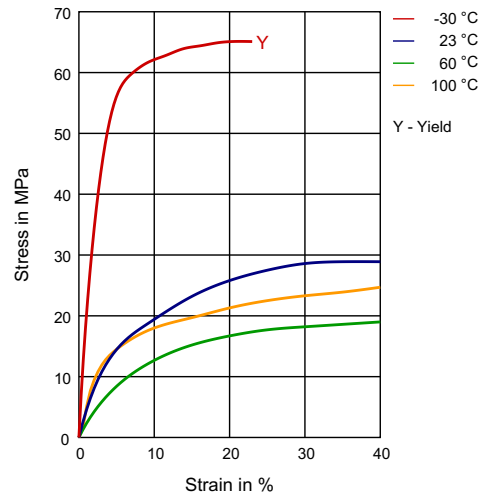

SECANT MODULUS-STRAIN

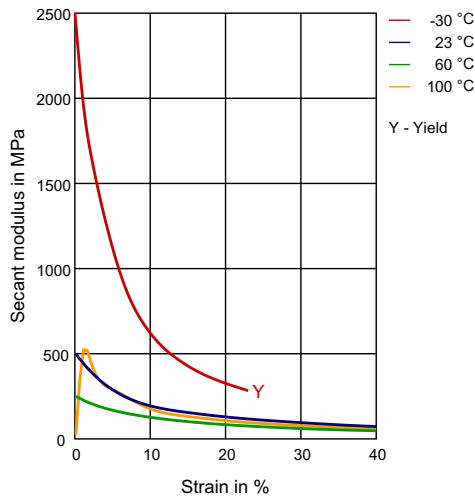

Processing conditions:

- Typical melt temperature (Min / Recommended / Max) : 210°C / 230°C / 280°C.
- Mold temperature : 20 - 60°C

- Drying time and temperature (only necessary for bags opened for more than two hours) : 4-6 hours at 80-90°C.

PROCESSING

Injection Molding

SPECIAL CHARACTERISTICS

Bio-Based, Heat Stabilized, Light Stabilized, UV Stable

RILSAN® BMNO P20 TLD

DELIVERY FORM

Pellets

ADDITIVES

Release agent, Plasticizer

REGIONAL AVAILABILITY

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Please consult Arkema's disclaimer regarding the use of Arkema's products on <https://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Rilsan® is a registered trademark of Arkema
© 2020 Arkema Inc. All rights reserved.

[rilsan.com](https://www.rilsan.com)

Arkema Inc. – Technical Polymers

900 First Avenue
King of Prussia, PA 19406
Tel.: +1 610 205 7000
Fax: +1 610 205 7497
[arkema-america.com](https://www.arkema-america.com)

RILSAN®
BY ARKEMA

Headquarters: Arkema France

420, rue d'Estienne d'Orves
92705 Colombes Cedex – France
Tel.: +33 1 49 00 80 80
Fax: +33 1 49 00 83 96
[arkema.com](https://www.arkema.com)